

level x eai srex eXu

level rod probe PUV 672

teausrei

level rod probe ai 5rod probe tor noXdsnuve level x eai srex eXu
cai epu(n x eai sr(Xg po(XubGpronei i noXXenuXg u=ead / 1"BE
tor x odslar) elded i leevecaxd pronei i noXenuXG i G uex
cH, H6/ moXtorx 3tood i ate x auer(al
c det(Xaued poi (uX ot i nre) (Xg
crodi naX be nsu

u=n=X(nal i pen(t(nauXoXi


cnoXXenuXoX =ead x ade ot i u(Xlei i i uel 1-5w f 0
ctood uXgeXui eXi or x ade ot i u(Xlei i i uel 1-5071
copuXal tood i ate noauXg) (u PF: P120f 1 f 3Bx x
celenu(nal noXXenuXoX) (u i nre) (Xg or opuXal y 1Bpplsg
cproenuXnlai i IP29K
cuex perausre raXgei f —10f °h
cx a. - operaXg prei i sre 1f bar

appl(nauXoX areai

ct(l level deuXoX (X nai ei aXd p(pel(Xei
cdrGrSXX(Xg noXd(uXoX proenuXoX
cex puG'tsll aXXosXnex eXu
ci (x ple3lo) moi ul(x (udeuXoX poi i (ble
ci (x ple level reXenuXoX poi i (ble
ci (x ple psx p(Xg reXenuXoX poi i (ble



PUV672c5c—

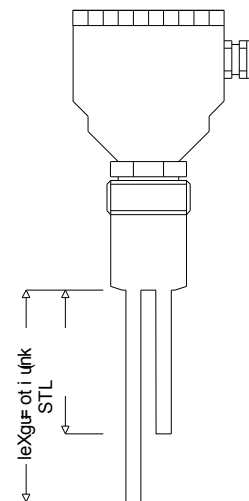

ordermode PUV 672—

order e. ax plenPUV672c5-A100-B200-C300-D800-A

noXXenuXoX =eadi

d i u(Xlei i i uel =ead i uXdard) (u i nre) (Xg
c2 i u(Xlei i i uel =ead i uXdard) (u y 1Bpplsg

leXgu# ot rod 1- rod

c B B x x leXgu# ot rod
c 44 leXgu# ot rod Q48leXgu# (X x x D

leXgu# ot rod B- rod

oAB B x x leXgu# ot rod
o44 leXgu# ot rod Q48leXgu# (X x x D

leXgu# ot rod w- rod

dh B B x x leXgu# ot rod
dh 44 leXgu# ot rod Q48leXgu# (X x x D

leXgu# ot rod 5- rod

d6 B B x x leXgu# ot rod
d6 44 leXgu# ot rod Q48leXgu# (X x x D

dei (gX ot rod

c 5x x rod) (u=osunoauXg
oA 5x x rod) (u uetloX noauXg
dh Mk x rod) (u=osunoauXg
d6 Mk x rod) (u uetloX noauXg