

## temperature measurement

### resistance thermometer YVT 572

#### features

- modular resistance thermometer for food industry
- adaptable with sleeve socket and process connection thread (see accessories)
- connection head made of stainless steel
- available with tapered measuring point
- protective fitting pressed closed to connection head
- temperature resistance PT100 directly constructed in protective fitting
- electrical connection on board (clamps)
- or programmable measuring transducer
- specials on request




YVT572-5-B-1A-V0-KMU

#### technical specifications

- protective fitting made of stainless steel V4A 1.4571
- diameter 6 mm
- connection thread for sleeve socket and process connection threads G 1/2"
- temperature ranges: -50 °C to +200 °C  
(extended ranges on customer's request)

#### application areas

- temperature measurement in pipelines
- temperature measurement in cases
- all food tangent applications
- temperature measurement at fast process demands

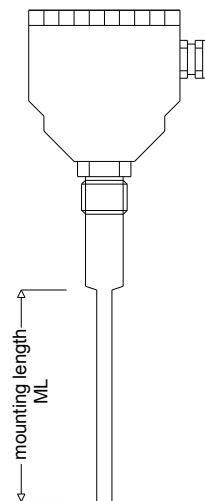

#### order-code YVT 572...

order example: YVT572-5-A-2A-V3-KMU (0-100 °C)

#### Connection heads

- 5 stainless steel head standard with screw cap, with screwing, protection class IP69K
- 6 stainless steel head standard with screw cap, with M12-plug, protection class IP69K

#### mounting length

- A 50 mm mounting length
- B 100 mm mounting length
- C 150 mm mounting length
- D 200 mm mounting length
- E 250 mm mounting length
- F 300 mm mounting length
- G 350 mm mounting length
- H 400 mm mounting length
- K mounting length on customer's request (please specify length)

#### type of sensor and tolerance

- 1A 1xPT100 class A
- 2A 2xPT100 class A
- 1C 1xPT100 1/3 DIN
- 2C 2xPT100 1/3 DIN
- KX types of sensor and tolerance on customer's request

#### tapered measuring point

- VO without taper
- V3 taper to 3 mm
- V4 taper to 4 mm

#### optional

- KMU with programmable measuring transducer (temperature range on request on preadjustment please specify)

updated 01/2018