

temperature measurement

resistance thermometer YVT 512

features

- resistance thermometer for temperature measurement in flush version
- adaptable with sleeve socket- and process connection thread (see accessories)
- connection head made of V4A
- protective fitting fixed with connection head
- temperature resistance PT100 directly constructed in protective fitting
- electrical connection on board (clamps)
or programmable measuring transducer
- specials on request

technical specifications


- protective fitting made of stainless steel 1.4404 respectively PEEK
- process connection thread G 1/2"A
- temperature ranges: -50 °C to +200 °C
(extended ranges on request)
- short reaction time
- tightening with max. 10-15 Nm

application areas

- temperature measurement in pipelines in the medium
- temperature measurement on pipelines (surface area)
- temperature measurement on cases
- temperature measurement on surfaces



YVT512-5-Z-1A

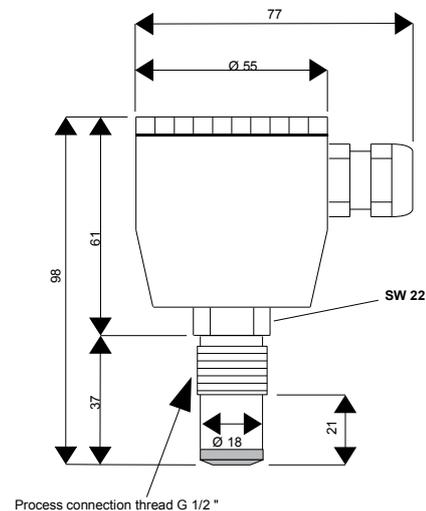

order-code YVT 512...

order example: YVT512-5-Z-1A-KMU (0-100 °C)

connection heads

- 5 stainless steel head standard with screw cap, with screwing, protection class IP69K
- 6 stainless steel head standard with screw cap, with M12-plug, protection class IP69K
- 15 stainless steel head extended design with screw cap, with screwing, protection class IP69K
- 16 stainless steel head extended design, with M12-plug, protection class IP69K

mounting type

- Z flush version

type of sensor and tolerance

- 1A 1xPT100 class A
- 2A 2xPT100 class A
- 1C 1xPT100 1/3 DIN
- 2C 2xPT100 1/3 DIN
- KX type of sensor and tolerance on customer's request

optional

- KMU with programmable measuring transducer (temperature range on request on preadjustment please specify)
- 2KMU with 2 programmable measuring transducer (head with extended design necessary, please specify the temperature range)

updated 01/2018